



Dial Thermometers - TI 060

- Werden dort verwendet, wo keine hohe Genauigkeit erforderlich ist.
- Used with gas and liquids which do not attack copper alloys.
- With its capillary tubing Thermometer's body can be mounted away from heat source (max. 2mt)

Industry Sector: Machinery Manufacturing, Heating, ventilation, air conditioning (HVAC) and vessel manufacturers





Konstruktive Eigenschaften

Montagetyp	· Rückseitiger Anschluss, am Instrumentenbrett montiert
Skalenbereichbereich (T)	· -40/+40°C · 0/+120°C · 0/+160°C · · · 0/+300°C · 0/+350°C
Blende	· Steel Zinc Plated
Fassung	· Edelstahl AISI-304
Fenster	· Glas
Anzeige	· Aluminium
Zeiger	· Kunststoff
Temperaturelement	· Gasbetätigt
Kapillarrohr Länge	· 1m · 2m · 4m · 6m · 10m

Einsatzigenschaften

Konformität	· EN 13190
Schutzrate	· IP 41
Lagertemperatur	· -20 ... +60 °C

Bild einer technischen Zeichnung - TI 060

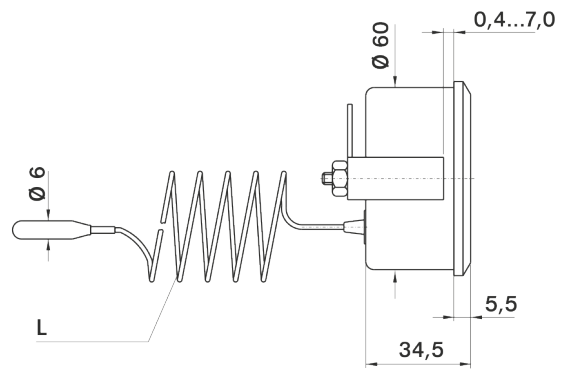

L = 1000	L = 2000	L = 3000
----------	----------	----------

060 502 /