

Dial Thermometers - 58x25 mm.



- Werden dort verwendet, wo keine hohe Genauigkeit erforderlich ist.
- Used with gas and liquids which do not attack copper alloys.
- With its capillary tubing Thermometer's body can be mounted away from heat source (max. 2mt)

Industry Sector: Machinery Manufacturing, Heating, ventilation, air conditioning (HVAC) and vessel manufacturers




Konstruktive Eigenschaften

Montagetyp	· Rückseitiger Anschluss, am Instrumentenbrett montiert
Skalenbereichbereich (T)	· -40/+40°C · 0/+120°C · 0/+160°C ·
Blende	· Kunststoff (ABS)
Fassung	· Kunststoff
Fenster	· Acryl
Anzeige	· Kunststoff
Temperaturelement	· Gasbetätigt
Kapillarrohr Länge	· 1m

Einsatzigenschaften



Konformität	· EN 13190
Genauigkeitsklasse	· CL 2.0
Schutzrate	· IP 41
Lagertemperatur	· -20 ... +60 °C

Bild einer technischen Zeichnung - 58x25 mm.

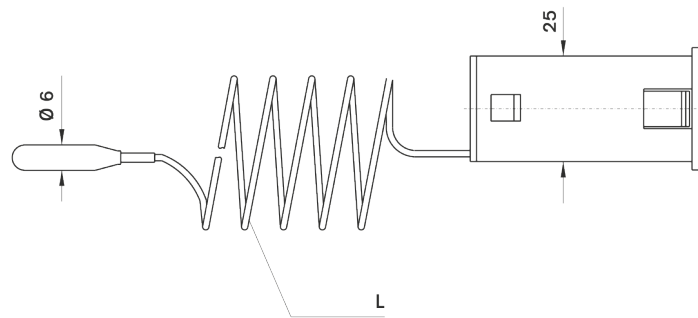

L = 1000	L = 2000
----------	----------

058 502 /

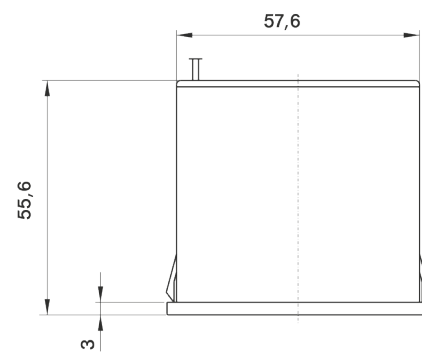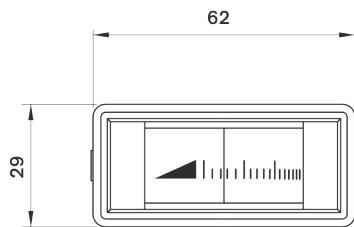

058 502 /