



Thermowells - WLW12SD

Suitable for Corrosive, Contaminated, High Temperature and Viscous Fluids.

Usage Properties

Process Fluid Temperature · -200/+400°C

Constructive Properties

Process Connection · Direct Connection

Instrument Connection · G 1/2"

Immersion Length · 100mm · 150mm · 200mm · 250mm · 300mm · 350mm · 400mm · 500mm · 700mm · 1000mm

Max. Pressure · 25 bar @ 500°


Manufactured · Built up

Body Form · Straight

Thermowell Diameter ·

Thermowell inner diameter · Ø10 mm

Technical Drawings - WLW12SD

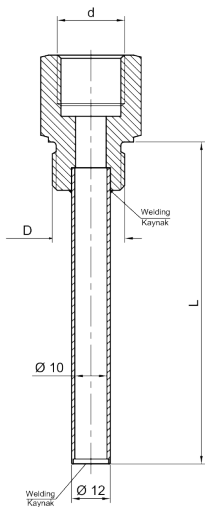

	1000
	700
	500
	400
	300
	250
G 1/2"	200
	150
	100
	50
	L

1127 /