

Safety Vents - Safety Valves - Settable Pressure

- Used as a safety equipment in Heating systems and plumbing to release over pressure from the system automatically.
- Safety valves can be set to a pressure between 1 to 10bars by the end user.


Usage Properties

Fluid Temperature	· 110 °C
Conformity	· CE 0408
Storage Temperature	· -20 ... +60 °C
Pressure Range	· 1 - 10 bar
Max.Pressure	· PN 16

Constructive Properties


Discharge Connection	· G 1/2" B
Material	· Brass (CuZn40Pb2)
Connection	· G 1/2" B · G 3/4" · G 1" · R 1/2" · R 3/4" · R 1"
Membrane Material	· NBR
Adjusting Bolt	· Steel Plated
Tension Spring	· Spring Steel

Technical Drawings - Safety Valves - Settable Pressure

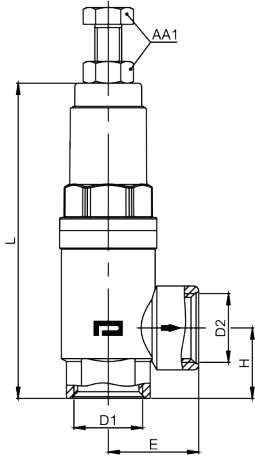

KOD	D1	D2	L	H	E	AA1
097910	G 1/2"	G 1/2"	94	21	27	13
097810	G 3/4"	G 3/4"	98	25	29	13
097710	G 1"	G 1"	108,5	30	35	13

0979 /

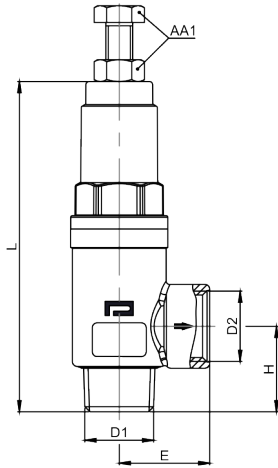

KOD	D1	D2	L	H	E	AA1
097900	R 1/2"	G 1/2"	98	25,5	27	13
097800	R 3/4"	G 3/4"	103	30	29	13
097700	R 1"	G 1"	113,5	35	35	13

0979 /