



Contact Pressure Gaguges - MK 160

- Used with gas and liquids which do not attack stainless steel 316L.

Industry Sector: Petro-chemical plants, Mining industry, Machinery Manufacturing and Hydraulics/Pneumatics.




Usage Properties

Operating Pressure (max.)	· Must not exceed full scale.
Fluid Temperature	· Maximum + 200 °C
Conformity	· EN 837 - 1
Accuracy Class	· CL 1.0
Ambient Temperature	· - 20 ... + 60 °C
Protection Rate	· IP 65
Mechanical Vibration Test	· 10Hz-150Hz 1 Octave/minute - 3 axis
Mechanical Shock Test Load	· 15g
Optimum Operating Range	· Between 0,0 x PN and 1,0 x PN
Over Pressure Limit	· F.S. x 1,3
Storage Temperature	· -40 ... +70 °C


Constructive Properties

Mounting Type	· Bottom Connection
Scale Unit	· bar/psi
Scale Range (PN)	· 0/0,6 · 0/1 · 0/1,6 · 0/2,5 · 0/4 · 0/6 · 0/10 · 0/16 · 0/25 · 0/40 · 0/60 · 0/100 · 0/160 · 0/250 · 0 - 315 · 0/400 · 0/600 · 0 - 1000
Vacuum Scale Range	· -1 / 0 · -1 / +0,6 · -1 / +1,5 · -1 / +3 · -1 / +5 · -1 / +9 · -1 / +15 · -1 / +24
Case	· Stainless Steel AISI-304
Bezel	· Stainless Steel AISI-304
Movement	· Stainless Steel AISI-304
Window	· Acrylic
Wetted Parts	· Stainless Steel AISI-316L
Connection	· G 1/2" B
Dial	· Aluminum
Pointer	· Aluminum
Welding	· TIG Welding
Contact Types	· 1NO · 1NC · 2NONO · 2NONC · 2NCNC · 2NCNO


Technical Drawings - MK 160

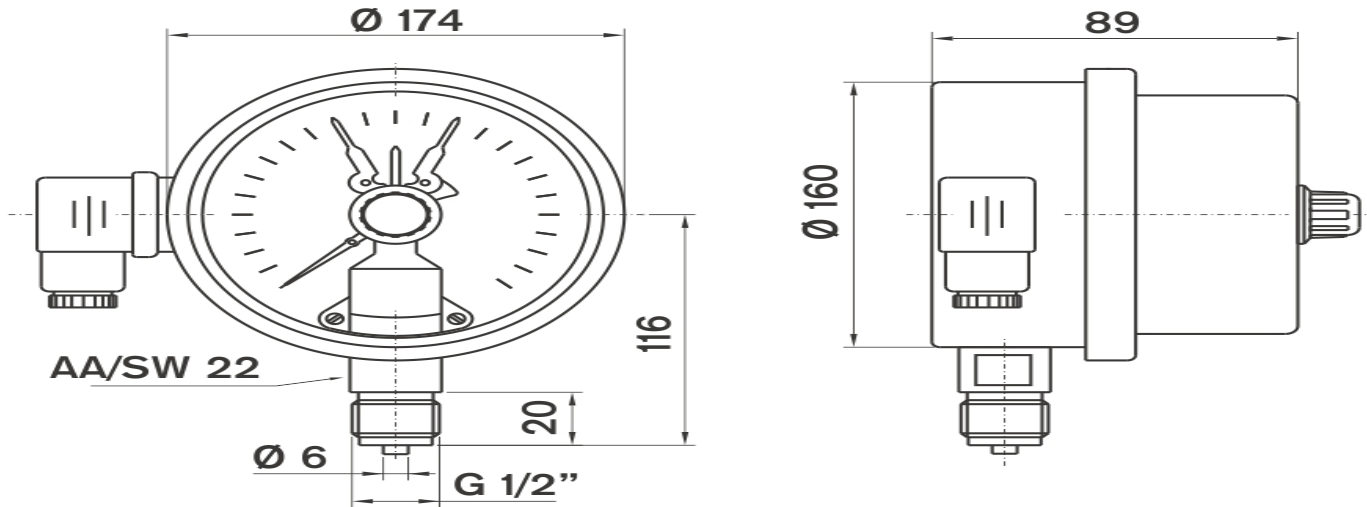

MK160DLS1 /

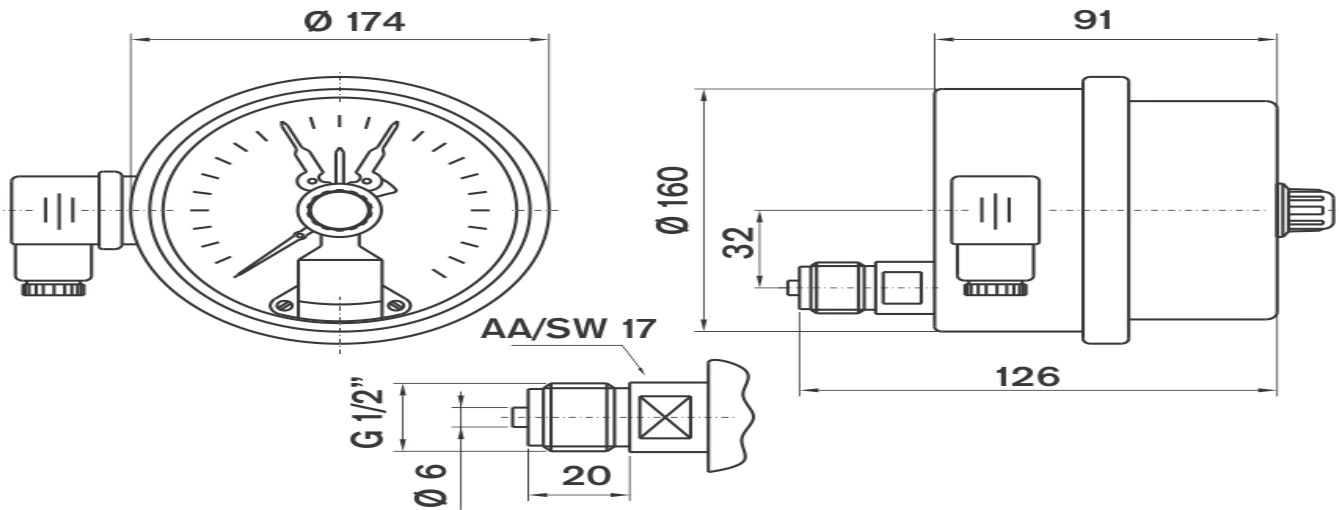


MK160DLS4 / Arkadan Bağlantılı Eksenden Kaçık

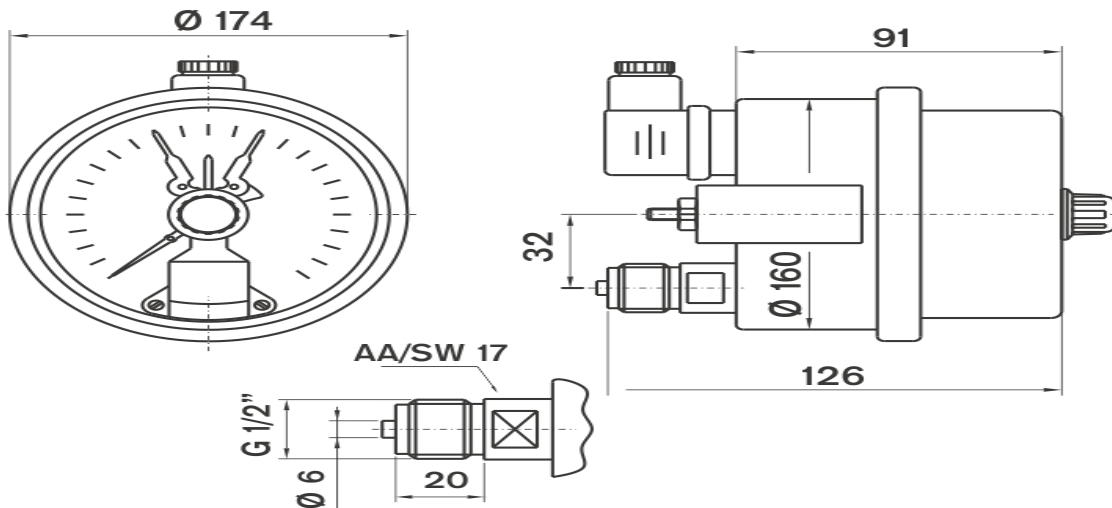


MK160DLS5 / Arkadan Bağlantılı Eksenden Kaçık Pano Tip

Technical Drawings - MK 160

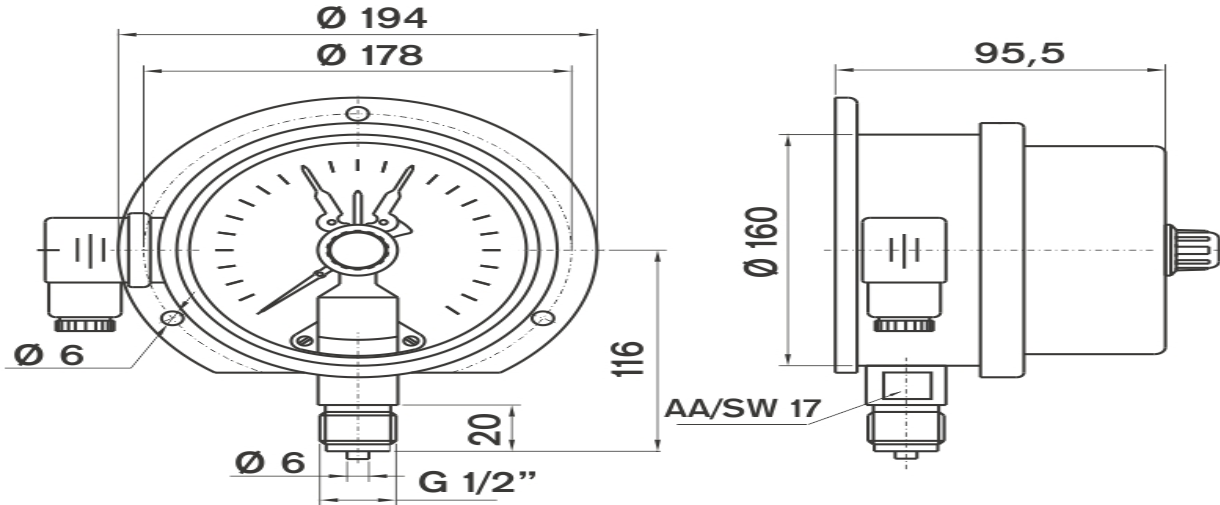

MK160DLS6 / Alttan Bağlantılı Arkadan Flanşlı

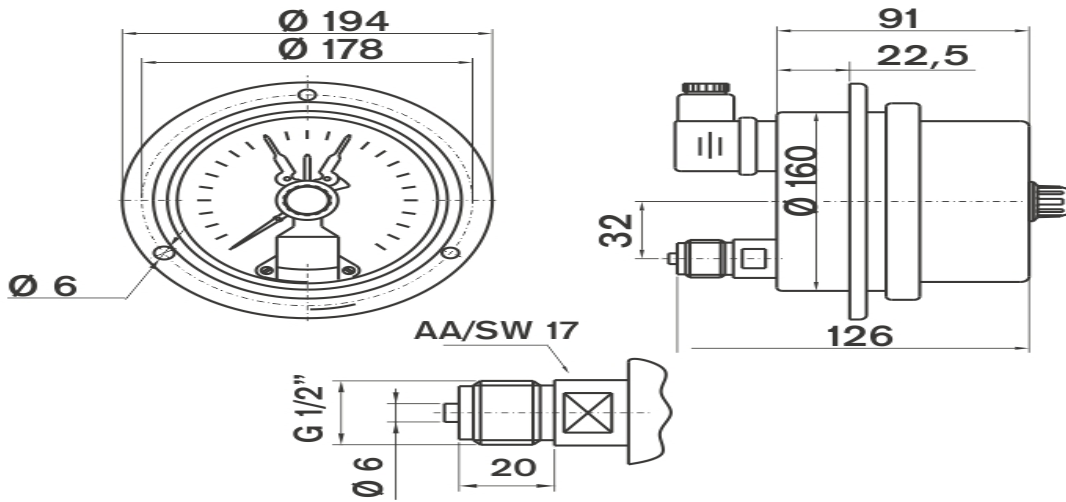

MK160DLS9 / Arkadan Bağlantılı Eksenden Kaçık Önden Flanşlı