

Radiator Valves - Lock-shield valves



- Connected to outlet of radiators to adjust the flow or to shut the flow off
- Useable in high rise buildings for equal heat dispersion between floors.


Usage Properties

Conformity	· TS 579
Fluid Temperature	· Maximum + 120 °C
Storage Temperature	· -20 ... +60 °C
Max.Pressure	· PN 10


Constructive Properties

Case	· Brass - Nickel Plated
Connection	· G 1/2" B
Nominal Diameter	· DN 15
Radiator Connection	· G 1/2" B
Sealing	· Brass
Knob	· Plastic

Technical Drawings - Lock-shield valves

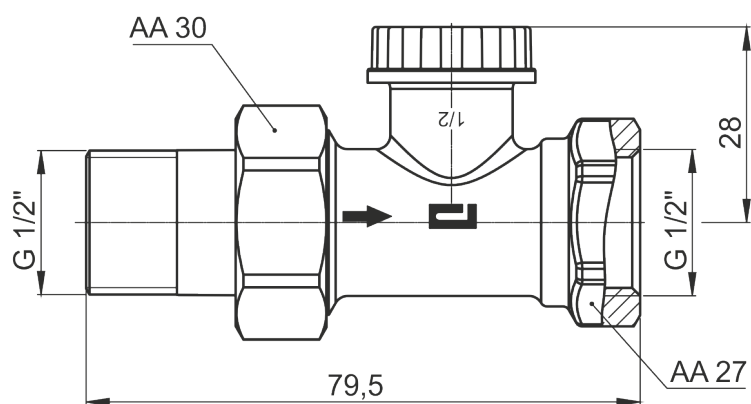

095821 /

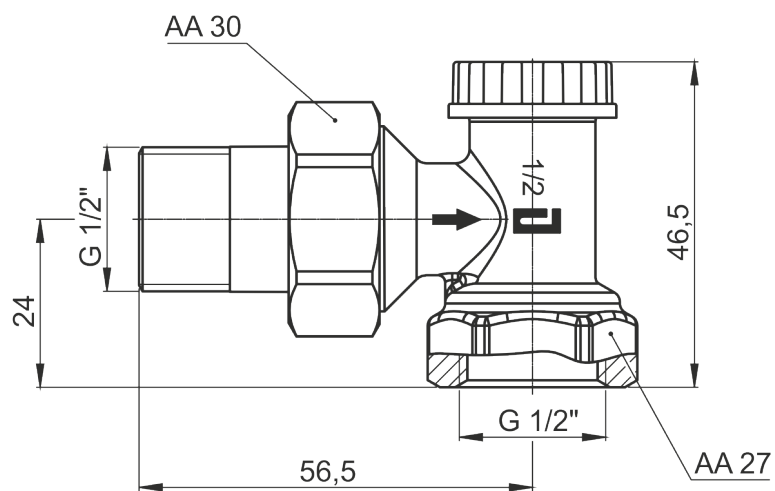

095811 /