

Dial Thermometers - TB 160

- Bi-Metals are made of two different metal sheet layers and a spiral form is given, as the metals expansion rates differ from each other, due to these factors it spins upwards around its axis by heat. By a transmission wire this movement is transmitted to the pointer.
 - Used where higher accuracy is needed.
 - Used with gas and liquids which do not attack stainless steel 316L.
 - Silicon filled types are used in vibrating environments
- Industry Sector: Petro-chemical plants, Machinery Manufacturing, Heating, ventilation, and conditioning (HVAC) and vessel manufacturers




Usage Properties

Conformity	· EN 13190
Accuracy Class	· CL 2.0
Protection Rate	· IP 51
Storage Temperature	· -40 ... +70 °C


Constructive Properties

Mounting Type	· Bottom Connection
Scale Unit	· °C
Scale Range (T)	· -30/+60°C · 0/+120°C · 0/+160°C · · · 0/+300°C · 0/+350°C · 0/+400°C · 0/+500°C
Case	· Stainless Steel AISI-304
Bezel	· Stainless Steel AISI-304
Window	· Glass
Connection	· G 1/2" B
Dial	· Aluminum
Pointer	· Aluminum
Temperature Element	· Bi-metal
Bi-Metal Stem	· Stainless Steel AISI-316
Thermowell	· Stainless Steel AISI-316L
Immersion Length	· 100mm · 150mm · 200mm · 250mm · 300mm · 400mm · 500mm · 700mm · 1000mm

Technical Drawings - TB 160

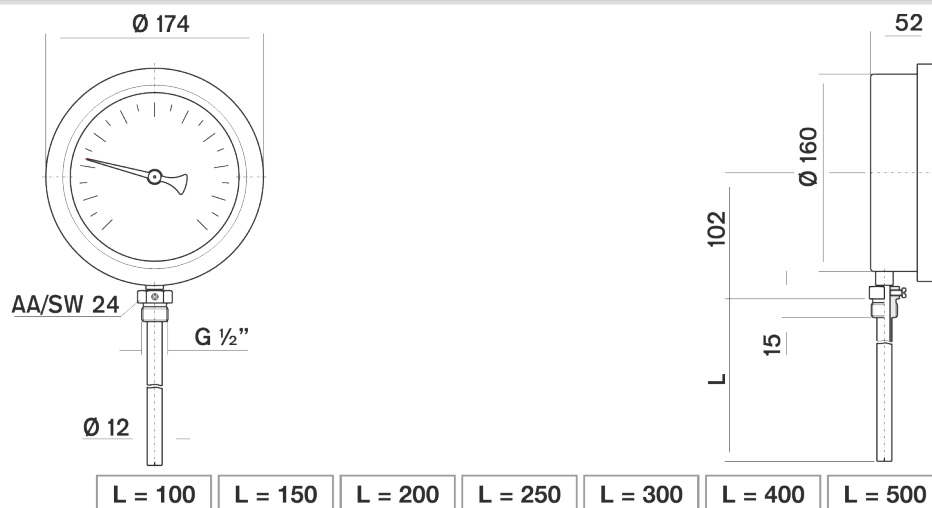

160 411 /

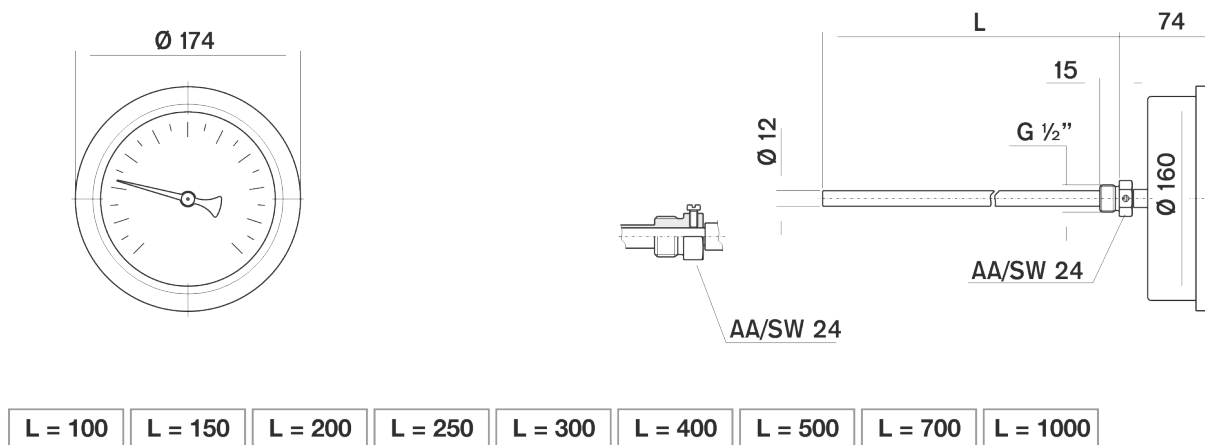

160 412 /