



## Dial Thermometers - TI 060

- Used where no high accuracy is needed.
- Used with gas and liquids which do not attack copper alloys.
- With its capillary tubing Thermometer's body can be mounted away from heat source (max. 2mt)

Industry Sector: Machinery Manufacturing, Heating, ventilation, air conditioning (HVAC) and vessel manufacturers





### Usage Properties

Conformity	· EN 13190
Protection Rate	· IP 41
Storage Temperature	· -20 ... +60 °C

### Constructive Properties

Mounting Type	· Back Connection Panel Mounted
Scale Range (T)	· -40/+40°C · 0/+120°C · 0/+160°C · · · 0/+300°C · 0/+350°C
Case	· Steel Zinc Plated
Bezel	· Stainless Steel AISI-304
Window	· Glass
Dial	· Aluminum
Pointer	· Plastic
Temperature Element	· Gas Actuated
Capillary Tube Length	· 1m · 2m · 4m · 6m · 10m

**Technical Drawings - TI 060**

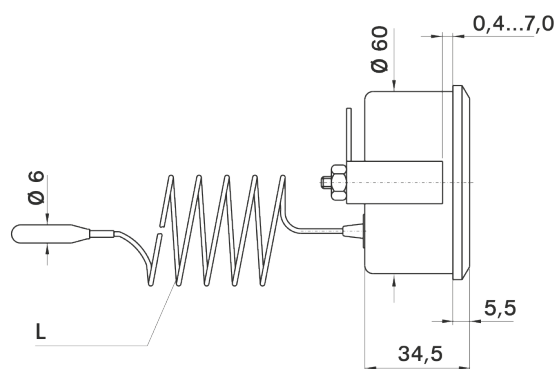

L = 1000	L = 2000	L = 3000
----------	----------	----------

060 502 /