



Ball Valves - Flammable Gases (Female-Female)

- Ball Valves flammable gases, allows adjusting flow of gas manually or turning the gas off.


Usage Properties

Conformity	· TS EN 331
Fluid Temperature	· -40°C...60°C
Storage Temperature	· -40 ... +70 °C
Max.Pressure	· Mop 5

Constructive Properties

Case	· Brass - Nickel Plated
Connection	· G 1/4" B · G 3/8" B · G 1/2" B · G 3/4" · G 1" · G 1 1/4" · G 1 1/2" · G 2"
Sphere	· Brass Chrome Plated
Handle	· Steel
Ball Seats	· PTFE
Shaft	· Brass Nickel Coated

Technical Drawings - Flammable Gases (Female-Female)

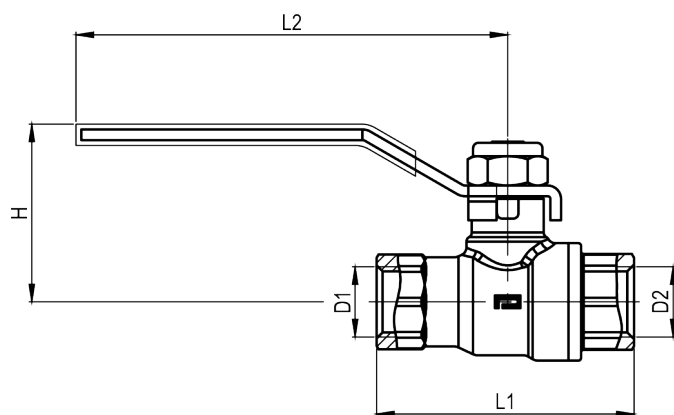

MOP 5					
KOD	D1	D2	L1	L2	H
092011	G 1/4"	G 1/4"	48,5	84	35
092311	G 3/8"	G 3/8"	49	84	35
092611	G 1/2"	G 1/2"	56	97	44
092911	G 3/4"	G 3/4"	66	97	46,5
093211	G 1"	G 1"	81	117	52
093511	G 1 1/4"	G 1 1/4"	91	117	57
093811	G 1 1/2"	G 1 1/2"	107	155	73
094111	G 2"	G 2"	120	155	80

0920110500 /