




Proprietà Costruttive	
Flow Detection	· Turbine Type Flowmeter with Hall Effect Sensor
Pump Connection	· Side
By-Pass Type	· Through PHE
Material	· CuZn40Pb2 (CW617N)
Flow Regulator	· 6 to 22 (lt/min)
Pressure Relief Valve	· 3 bar ½"




## Immagine di disegno tecnico - HB-109




- 1 DHW Filter
- 2 Flow Regulator
- 3 Flow Sensor
- 4 NTC Sensor Connection
- 5 Filling Tap
- 6 Pressure Switch/Sensor Conn.
- 7 Circulation Pump

- 8 Expansion Vessel Conn.
- 9 Pressure Gauge Conn.
- 10 3 Way Valve Motor
- 11 Automatic Bypass
- 12 3 Way Valve
- 13 Safety Valve
- 14 Plate Heat Exchanger
- A Heating Delivery CH
- **B** Sanitary Water Outlet DW
- © Sanitary Water Inlet DW
- D Heating Return CH

/

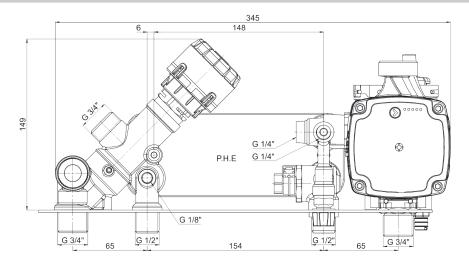



/