




Proprietà Costruttive	
Flow Detection	· Turbine Type Flowmeter with Hall Effect Sensor
Pump Connection	· Front
By-Pass Type	· Through PHE
Material	· CuZn40Pb2 (CW617N)
Flow Regulator	· 6 to 22 (lt/min)
Pressure Relief Valve	· 3 bar ½"




Immagine di disegno tecnico - HB-115




- 1 DHW Filter
- 2 Flow Regulator
- 3 Flow Sensor
- 4 NTC Sensor Connection
- 5 Filling Tap
- 6 Circulation Pump
- Expansion Vessel Connection

- 8 Safety Valve
- 9 3 Way Valve Motor
- 10 Automatic Bypass
- 11 Pressure Switch Sensor Connection
- 12 Pressure Gauge Conn.
- 13 3 Way Valve
- 14 Plate Heat Exchanger
- A Heating Delivery CH
- B Sanitary Water Outlet DW
- © Sanitary Water Inlet DW
- D Heating Return CH

1

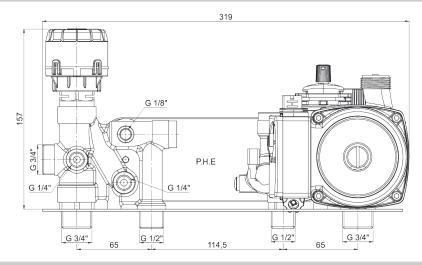



1