




Proprietà Costruttive	
Flow Detection	· Turbine Type Flowmeter with Hall Effect Sensor
Pump Connection	· Front
By-Pass Type	· External - Through copper tube
Material	· CuZn40Pb2 (CW617N)
Flow Regulator	· 6 to 22 (lt/min)
Pressure Relief Valve	· 3 bar ½"



## Immagine di disegno tecnico - HB-116




- 1 DHW Filter
- 2 Flow Regulator
- 3 Flow Sensor
- 4 Filling Tap
- 6 Circulation Pump
- 6 Expansion Vessel Connection
- Safety Valve

- 8 External Bypass
- 9 3 Way Valve Motor
- 10 Pressure Switch Sensor Connection
- 11 3 Way Valve
- 12 Plate Heat Exchanger

- A Heating Delivery CH
- **B** Sanitary Water Outlet DW
- © Sanitary Water Inlet DW
- D Heating Return CH

/

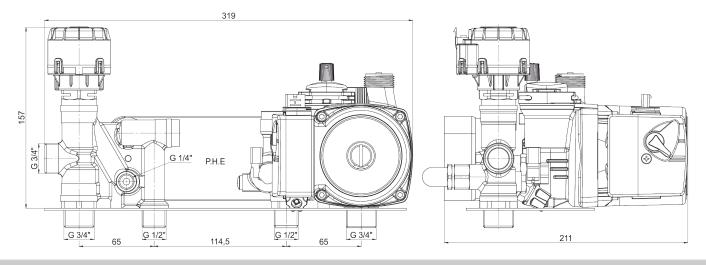

/