


Hidrolik Gruplar - HB-120



Kombi tipi ısıtma cihazları için, önden pompa bağlantılı, pirinç hidrolik grup.

Tüm sirkülasyon pompası marka ve modelleri ile çalışmaya uygun olup, on-off ya da stepper tipi 3 yollu valf motorları ile kullanılabilir.


Standart teslimat içeriğinde gidiş ve dönüş blokları, DHW filtresi, müşteri talebine uygun kapasitede akış düzenleyici, Hall effect sensörlü radyal türbinli tip akış ölçer, manuel doldurma musluğu, 3 yollu valf kartuşu, pirinç ya da plastik 3 bar ½" emniyet ventili ile ½" ve ¾" bağlantı nipelleri bulunur.

Hidrolik grup müşteri talebi doğrultusunda, plakalı eşanjör, 3 yollu valf motoru, basınç siviç veya sensörü ve NTC sensörü ile sunulabilir.

Yapısal Özellikler

Akış Ölçümü	· Hall Effect Sensörlü Türbin Tip Akış Ölçer
Pompa Bağlantısı	· Önden
By Pass Yöntemi	· PHE içinden
Gövde Malzemesi	· CuZn40Pb2 (CW617N)
Akış Düzenleyici	· 6 - 22 (lt/dk)
Emniyet Ventili	· 3 bar ½"

Teknik Çizimler - HB-120

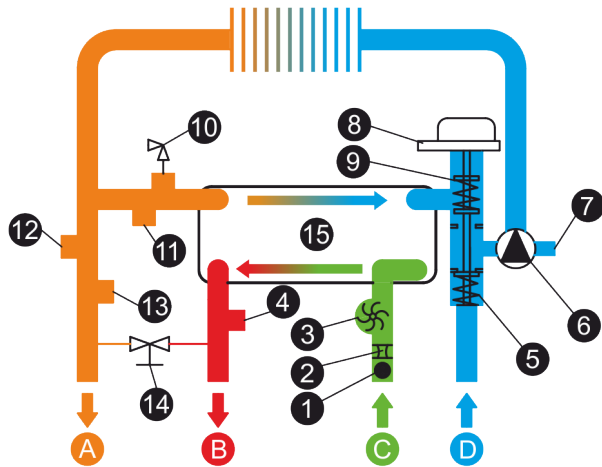

- | | |
|-------------------------------|--------------------------------------|
| 1 DHW Filter | 9 Automatic Bypass |
| 2 Flow Regulator | 10 Safety Valve |
| 3 Flow Sensor | 11 Pressure Switch Sensor Connection |
| 4 NTC Sensor Connection | 12 Heating Temp. Sensor Con. |
| 5 3 Way Valve | 13 Drain Valve |
| 6 Circulation Pump | 14 Filling Tap |
| 7 Expansion Vessel Connection | 15 Plate Heat Exchanger |
| 8 3 Way Valve Motor | |

A Heating Delivery CH

B Sanitary Water Outlet DW

C Sanitary Water Inlet DW

D Heating Return CH

