



Hidrolik Gruplar - HB-103

Kombi tipi ısıtma cihazları için, yandan pompa bağlantılı, kompozit hidrolik grup.

Tüm sirkülasyon pompası marka ve modelleri ile çalışmaya uygun olup, on-off ya da stepper tipi 3 yollu valf motorları ile kullanılabilir.


Standart teslimat içeriğinde gidiş ve dönüş blokları, DHW filtresi, müşteri talebine uygun kapasitede akış düzenleyici, Hall effect sensörlü radyal türbinli tip akış ölçer, manuel doldurma musluğu, 3 yollu valf kartuşu, plastik 3 bar ½" emniyet ventili ile ½" ve ¾" bağlantı nipelleri bulunur.

Hidrolik grup müşteri talebi doğrultusunda, plakalı eşanjör, 3 yollu valf motoru, basınç siviç veya sensörü ve NTC sensörü ile sunulabilir.

Yapısal Özellikler

Akış Ölçümü	· Hall Effect Sensörlü Türbin Tip Akış Ölçer
Pompa Bağlantısı	· Yandan
By Pass Yöntemi	· PHE içinden
Gövde Malzemesi	· Plastik (PA66 GF30) · Pirinç (CuZn40Pb2)
Akış Düzenleyici	· 6 - 22 (lt/dk)
Emniyet Ventili	· 3 bar ½"

Teknik Çizimler - HB-103

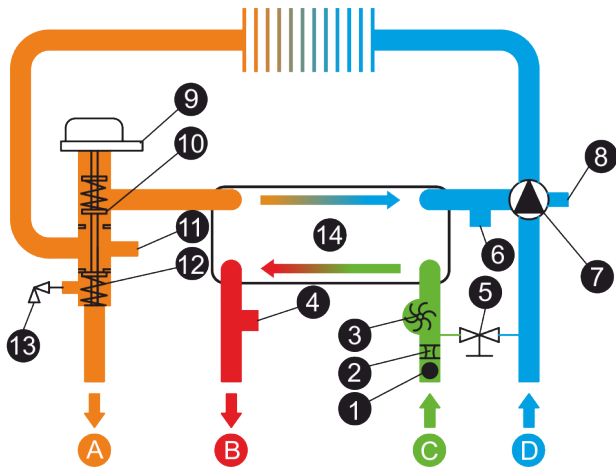

- | | |
|--------------------------------|--------------------------|
| 1 DHW Filter | 8 Expansion Vessel Conn. |
| 2 Flow Regulator | 9 3 Way Valve Motor |
| 3 Flow Sensor | 10 Automatic Bypass |
| 4 NTC Sensor Connection | 11 Pressure Gauge Conn. |
| 5 Filling Tap | 12 3 Way Valve |
| 6 Pressure Switch/Sensor Conn. | 13 Safety Valve |
| 7 Circulation Pump | 14 Plate Heat Exchanger |

A Heating Delivery CH

B Sanitary Water Outlet DW

C Sanitary Water Inlet DW

D Heating Return CH

