

## Hidrolik Gruplar - HB-108

Kombi tipi ısıtma cihazları için, yandan pompa bağlantılı, pirinç hidrolik grup.

Tüm sirkülasyon pompası marka ve modelleri ile çalışmaya uygun olup, on-off ya da stepper tipi 3 yollu valf motorları ile kullanılabilir.


Standart teslimat içeriğinde gidiş ve dönüş blokları, DHW filtresi, müşteri talebine uygun kapasitede akış düzenleyici, Hall effect sensörlü radyal türbinli tip akış ölçer, manuel doldurma musluğu, 3 yollu valf kartuşu, pirinç ya da plastik 3 bar ½" emniyet ventili ile ½" ve ¾" bağlantı nipelleri bulunur.

Hidrolik grup müşteri talebi doğrultusunda, plakalı eşanjör, 3 yollu valf motoru, basınç siviç veya sensörü ve NTC sensörü ile sunulabilir.

### Yapısal Özellikler

|                  |                                              |
|------------------|----------------------------------------------|
| Akış Ölçümü      | · Hall Effect Sensörlü Türbin Tip Akış Ölçer |
| Pompa Bağlantısı | · Yandan                                     |
| By Pass Yöntemi  | · PHE içinden                                |
| Gövde Malzemesi  | · CuZn40Pb2 (CW617N)                         |
| Akış Düzenleyici | · 6 - 22 (lt/dk)                             |
| Emniyet Ventili  | · 3 bar ½"                                   |

## Teknik Çizimler - HB-108

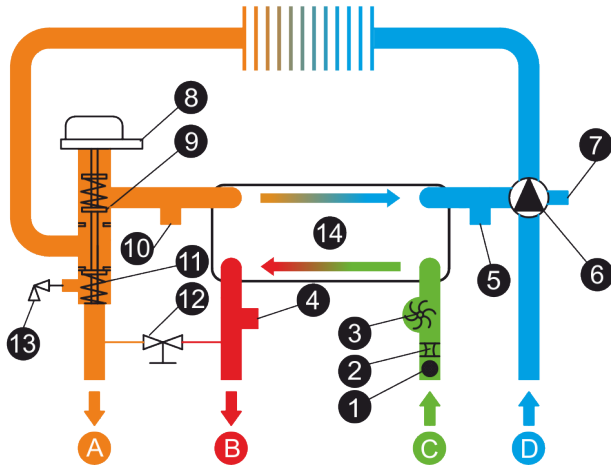

- |                                |                         |
|--------------------------------|-------------------------|
| 1 DHW Filter                   | 8 3 Way Valve Motor     |
| 2 Flow Regulator               | 9 Automatic Bypass      |
| 3 Flow Sensor                  | 10 Pressure Gauge Conn. |
| 4 NTC Sensor Connection        | 11 3 Way Valve          |
| 5 Pressure Switch/Sensor Conn. | 12 Filling Tap          |
| 6 Circulation Pump             | 13 Safety Valve         |
| 7 Expansion Vessel Connection  | 14 Plate Heat Exchanger |

A Heating Delivery CH

B Sanitary Water Outlet DW

C Sanitary Water Inlet DW

D Heating Return CH

